




Przekrój 15 G-G

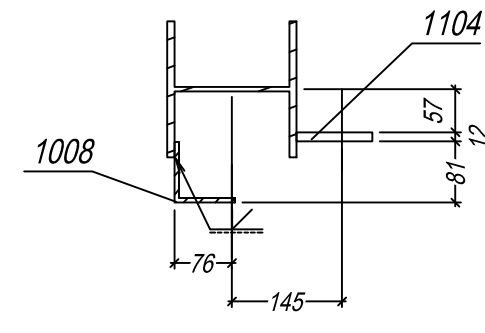


Przekrój 15 D-D

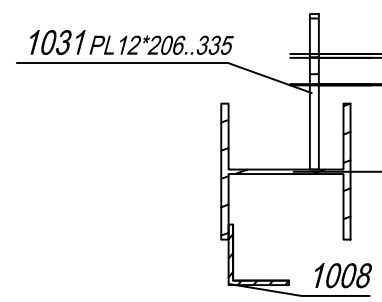


Przekrój 15 E-E

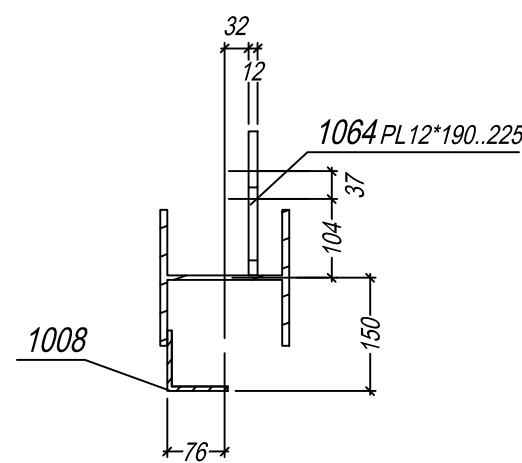

Przekrój 15 B-B

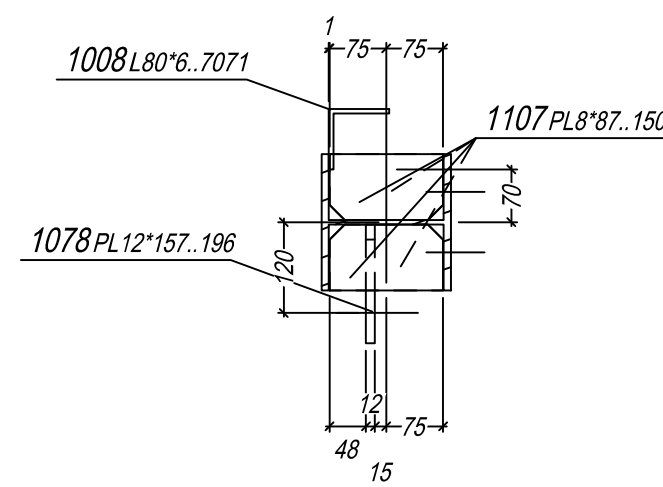

Widok 15 A-A

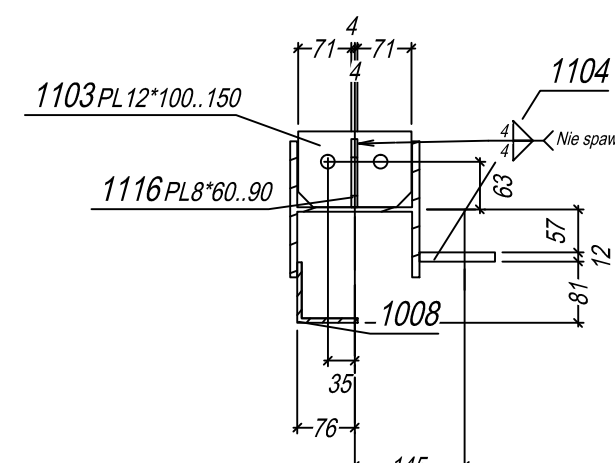

Przekrój 15 C-C

** Zest. dla jednego el. wysyłkowego-					Poz.	15	Suma	1x	Wykonać
Nr.	Trn'	Poz.	Nazwa	Szulk	Profil	Materiał	Długość	Waga	Ozn.
1	1	15	Szupa	1	HEA180	S235JR	11946	424.07	
2	1	1008	Kątownik	1	L80*6	S235JR	7071	51.32	
3	1	1009	Kątownik	1	L80*6	S235JR	3468	25.62	
4	1	1022	Blacha	1	PL 12*240	S235JR	240	5.43	
5	1	1030	Blacha	1	PL 12*209	S235JR	254	5.01	
6	1	1031	Blacha	1	PL 12*206	S235JR	335	6.49	
7	1	1064	Blacha	1	PL 12*190	S235JR	225	4.03	
8	1	1078	Blacha	1	PL 12*157	S235JR	196	2.90	
9	1	1103	Blacha	1	PL 12*100	S235JR	150	1.41	
10	1	1104	Blacha	4	PL 12*100	S235JR	120	4.52	
11	1	1107	Blacha	4	PL8*87	S235JR	150	3.28	
12	1	1108	Blacha	4	PL10*87	S235JR	150	4.10	
13	1	1116	Blacha	1	PL8*60	S235JR	90	0.34	
Waga całkowita [kg]							538.50		
Gabaryty (W x S x D): 306 x 362 x 1958									